Concrete Pump Attachment

D6528


"We've completed three jobs with our D6528 Attachment, and it's already paid for itself." - Rock Miller, Pool Crafters

Can be used for:

1/2" (13 mm) Aggregate Concrete Mixes 3/8" (10 mm) Aggregate Shotcrete **Cellular Concrete Faux Rock Construction Insulated Concrete Forms**

Slab Jacking **Block Fill**

Slabs

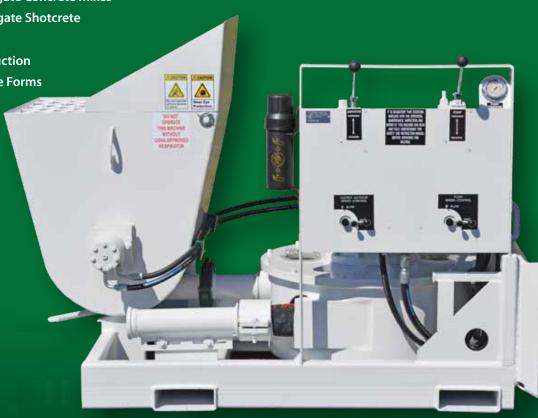

Blastcrete Pumps are the

most simple and safe concrete pumps on the market to maintain and operate!



Anniston, AL www.blastcrete.com







Features

Forklift Pick-Up

3" Hydraulic Squeeze Pump with variable speed from 0-12 cubic yards per hour

Universal Skid Steer Mounting Plate

Manual Hydraulic Controls

Hydraulic Remixer in the Receiving Hopper



Why Squeeze Pumps?

Only one wear part

Simple: no skilled operator needed

Safe: runs in reverse

Cleans up in 5 minutes

Specifications

Length 69" (175 cm.)

Width 48" (122 cm.)

Height 48" (122 cm.)

Weight 1988 lbs. (902 kg.)

Output 12 yd³/hr. (9 m³/hr.)

Pump outlet 3" (75 mm)

Pump pressure 400 PSI (28 bar)

Hydraulic oil requirement 18 GPM @ 3,000 PSI (68 LPM @ 207 bar)

Vertical pumping distance 100 ft. (30 m)

Horizontal pumping distance 250 ft. (76 m)